

THE GENERATOR SALES & SERVICING CO. LTD

WWW.GENERATORSAS.CO.UK

TEL: 01208 832094

INFO@GENERATORSAS.CO.UK



Output Power

50HZ

584KVA

Standby Power (ESP)

kVA

584

kW

467

Prime Power (PRP)

kVA

530

kW

424

Size

W x L x H
(mm)

Weight
(kg)

Fuel Tank
(lt)

Noise dB(A)
@ 1m




Canopied
Open Skid

1650 x 5000 x 2250
1650 x 3300 x 1970

4672
3617

900
900

TBA
TBA

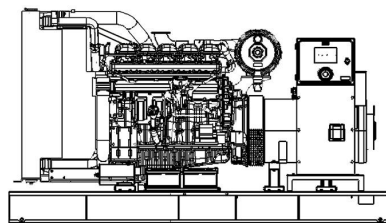

Continuous Power

The maximum power which a generating set is capable of delivering continuously whilst supplying a constant electrical load. Average load can be 100%. The generator must not be overloaded.

Standby Power

The max power available during a variable electrical power sequence, under the stated operating conditions, for which a generating set is capable of delivering in the event of a utility power outage or under test conditions for up to 200 hrs of operation per year under average of 70% load. Overloading isn't permissible.

Prime Power

The maximum power which a generating set is capable of delivering continuously whilst supplying a variable electrical load. Average load should be 70%. The generator can be overloaded 10% for 1 hour per 12 hrs.

50 Hz Diesel Generator Sets



Engine

Manufacturer		DOOSAN
Model		DP158LD
Cylinder Configuration		V TYPE
No of Cylinders		8
Displacement	lt	14,6
Stroke	mm	142
Bore	mm	128
Compression Ratio		15:01
Aspiration		TURBOCHARGE-INTERCOOLER
Governor Type		ELECTRONIC
Cooling System		WATER
Coolant Capacity	lt	79
Lubrication Oil Capacity	lt	22
Electrical System	VDC	24
Speed / Frequency 50 Hz	rpm	1500 rpm / 50 Hz
Engine Gross Power (Standby 50 Hz)	kW	510
Fuel Consumption %110 ESP 50 Hz	lt/h	TBA
Fuel Consumption %100 PRP 50 Hz	lt/h	127,8
Fuel Consumption %75 PRP 50 Hz	lt/h	91,1
Fuel Consumption %50 PRP 50 Hz	lt/h	60,9
Exhaust Outlet Temperature 50 Hz	°C	561
Exhaust Gas Flow 50 Hz	m3/min	98
Combustion Air Flow 50 Hz	m3/min	33,1
Cooling Air Flow 50 Hz	m3/min	700

Alternator

Manufacturer		MARELLI
Model		MJB355SB4
No of Phases		3
Power Factor		0,8
No of Bearings		SINGLE
No of Poles		4
No of Leads		12
Voltage Regulation (Steady State)		± %0,5 [In Steady State, Speed from (-%2) to (+%5) and CosØ=0,8-1]
Insulation Class		H
Degree of Protection		IP 23
Excitation System		AVR (Automatic Voltage Regulator), Brushless
Connection Type		STAR
Total Harmonic Content (No Load)		< %2
Frequency	Hz	50
Voltage Output 50 Hz	VAC	230 / 400
Rated Power (Standby) 400_50 Hz	kVA	625
Efficiency (4/4_400 V_50 Hz)	%	94,6

STANDARD EQUIPMENT

ENGINES

Recognised branded diesel engines with proven technology ensure a reliable and safe power supply together with low fuel consumption. All are compliant with ISO8528, ISO3046, BS5514, DIN 6271 standards. Service and maintenance parts readily available through a global network.

ALTERNATORS

Only leading alternator brands such as Stamford, Marelli, Mecc-Alte are used in our generators, providing high quality productivity and durability. All alternators have passed the necessary test processes and found to be appropriate according to EC 60034-1; CEI EN 60034-1; BS 4999-5000; VDE 0530, NF 51-100,111; OVE M-10, NEMA MG 1.22 standards. Alternators are maintenance free, single bearing, self exciting with electronic Automatic Voltage Regulation.

CHASSIS/FUEL TANK

Chassis are manufactured from high grade steel, powder coated and feature an integral fuel tank with fuel level gauge. Base frame has integrated lifting lugs for ease of transportation and positioning. Engine vibration is kept to a minimum thanks to the rigid design and the anti-vibration heavy duty rubber mounts. All generators feature a fully bunded base tank.

COOLING SYSTEM

High quality, water cooled system. Consisting of industrial radiator, expansion tank and cooler fan all thermostatically controlled. Designed to keep operational temperature at optimum performance. Water heater comes as standard providing peak conditions for cold weather starting.



Standard Sound Attenuated Canopies

- Compatible with 2000/14/EC directives, certified noise emission level
- Lifting and securing points for transport and positioning
- Hidden exhaust inside the canopy
- Emergency stop button located on the canopy
- Improved air suction channel to ensure homogenous cooling inside the enclosure
- Radiator and exhaust outlet designed to vent from top of Canopy.
- Easy access to coolant fill for radiator
- Amplified paint system against corrosion and rust,
- Improved performance in terms of sound insulation,
- Demounted parts that make transportation and maintenance easier,



The DSE7310 is an Auto Start Control Module and the DSE7320 is an Auto Mains (Utility) Failure Control Module suitable for a wide variety of single, diesel or gas, gen-set applications.

Monitoring an extensive number of engine parameters, the modules will display warnings, shutdown and engine status information on the back-lit LCD screen, illuminated LEDs, remote PC and via SMS text alerts (with external modem).

The DSE7320 will also monitor the mains (utility) supply. The modules include USB, RS232 and RS485 ports as well as dedicated DSENet® terminals for system expansion.

Both modules are compatible with electronic (CAN) and non-electronic (magnetic pick-up/alternator sensing) engines and offer an extensive number of flexible inputs, outputs and extensive engine protections so the system can be easily adapted to meet the most demanding industry requirements.

The extensive list of features includes enhanced event and performance monitoring, remote communications, PLC functionality and dual mutual standby (DSE7310 only) to reduce engine wear.

The modules can be easily configured using the DSE Configuration Suite PC software. Selected front panel editing is also available.



DSE7320



KEY FEATURES

- 4-Line back-lit LCD text display
- Five key menu navigation
- Front panel editing with PIN protection
- Customisable status screens
- Power save mode
- Support for up to three remote display units
- 9 configurable inputs
- 8 configurable outputs
- Flexible sender inputs
- Configurable timers and alarms
- 3 configurable maintenance alarms
- Multiple date and time scheduler
- Configurable event log (250)
- CAN engine support
- Integral PLC editor
- Easy access diagnostic page
- CAN and Magnetic Pick-up/Alt. sensing
- Fuel usage monitor and low fuel alarms
- Charge alternator failure alarm
- Manual speed control (on compatible CAN engines)
- Manual fuel pump control
- Engine exerciser
- "Protections disabled" feature
- kW & kV Ar protection

- Reverse power (kW & kV Ar) protection
- LED and LCD alarm indication
- Power monitoring (kW h, kV Ar, kV A h, kV Ar h)
- Load switching (load shedding and dummy load outputs)
- Automatic load transfer (DSE7320)
- Unbalanced load protection
- Independent Earth Fault trip
- True dual mutual standby with load balancing timer (DSE7310 only)
- USB connectivity
- Backed up real time clock
- Fully configurable via DSE Configuration Suite PC software
- Configurable display languages
- Remote SCADA monitoring via DSE Configuration Suite PC software
- User selectable RS232 and RS485 communications
- Configurable Gencomm pages
- Advanced SMS messaging (additional external modem required)
- Start & stop capability via SMS messaging
- Additional display screens to help with modem diagnostics
- Idle control for starting & stopping.

- DSENet® expansion compatible
- Heated display option available

KEY BENEFITS

- 132 x 64 pixel ratio display for clarity
- Real-time clock provides accurate event logging
- Multiple date and time scheduler
- Set maintenance periods can be configured to maintain optimum engine performance
- Ethernet communications (via DSE855 module), provides advanced remote monitoring
- Modules can be integrated into building management systems (BMS)
- Increased input and output expansion capability via DSENet®
- Licence-free PC software
- IP65 rating (with supplied gasket) offers increased resistance to water ingress
- PLC editor allows user configurable functions to meet specific application requirements

THE GENERATOR SALES & SERVICING COMPANY LTD

☎ 01208 832094 ✉ info@generatorsas.co.uk

